

## **GB2421529B**

Publication Title:

No title available

Abstract:

Abstract not available for GB2421529B

Data supplied from the esp@cenet database - Worldwide

-----  
Courtesy of <http://v3.espacenet.com>

---

(12) **UK Patent**

(19) **GB**

(11) **2 421 529**

(13) **B**

---

(45) Date of publication: **05.09.2007**

---

(54) Title of the invention: **A method of radially expanding and plastically deforming tubular members**

(51) INT CL: **E21B 43/10** (2006.01) **E21B 17/042** (2006.01) **E21B 29/00** (2006.01)

---

(21) Application No: **0603656.0**

(22) Date of Filing: **01.09.2004**

(30) Priority Data:  
(31) **60499576** (32) **02.09.2003** (33) **US**

(86) International Application Data:  
**PCT/US2004/028423 En 01.09.2004**

(87) International Publication Data:  
**WO2005/021921 En 10.03.2005**

(43) Date A Publication: **28.06.2006**

(72) Inventor(s):  
**Scott Costa**

(73) Proprietor(s):  
**Enventure Global Technology**  
**(Incorporated in USA - Delaware)**  
**Suite 350, 15995 North Barkers Landing,**  
**Houston, Texas 77079,**  
**United States of America**

(74) Agent and/or Address for Service:  
**Haseltine Lake**  
**Redcliff Quay, 120 Redcliff Street, Bristol,**  
**BS1 6HU, United Kingdom**

(52) UK CL (Edition X):  
**NOT CLASSIFIED**

(56) Documents Cited:  
**US 6722443 B1** **US 6607220 B2**  
**US 6543552 B1** **US 6527049 A**  
**US 6419025 B1** **US 20040231839 A1**  
**US 20040221996 A1** **US 20040060706 A1**  
**US 20030075338 A1** **US 20030042022 A1**

(58) Field of Search:  
As for published application 2421529 A viz:  
**Other**  
**US: 166/277, 382207, 208, 297, 55, 55.1,**  
**206, 212, 216, 214, 242.1, 242.2**  
updated as appropriate

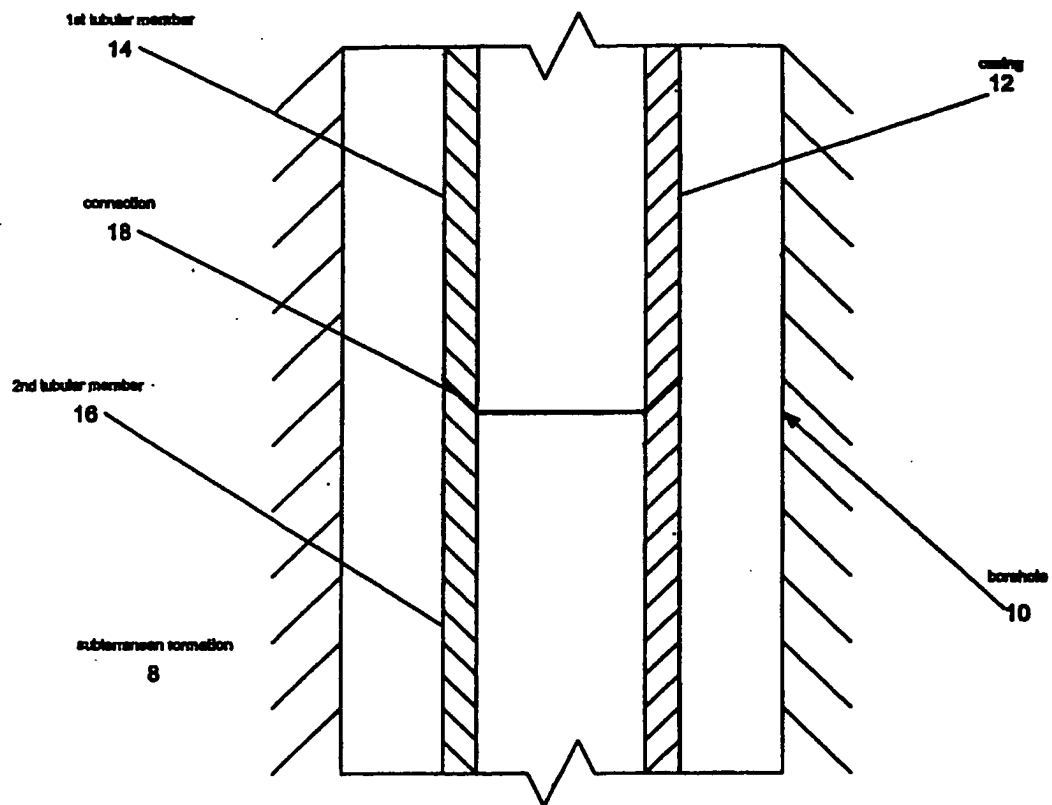


Fig. 1

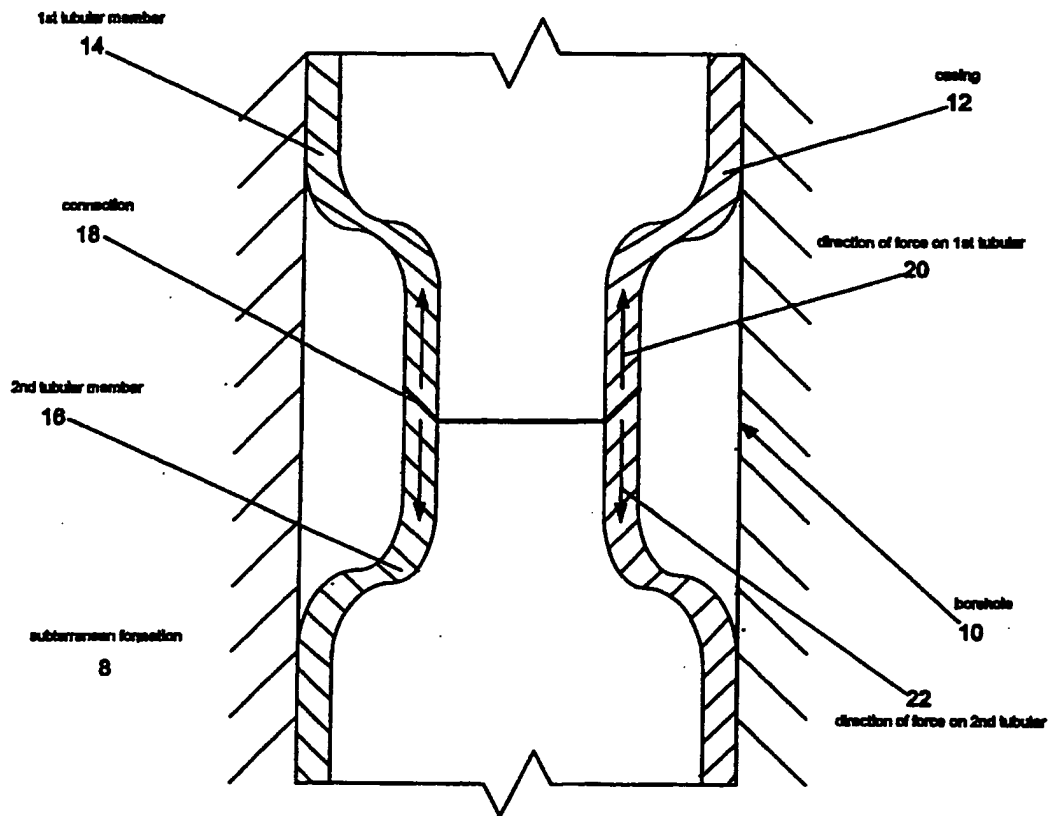


Fig. 2

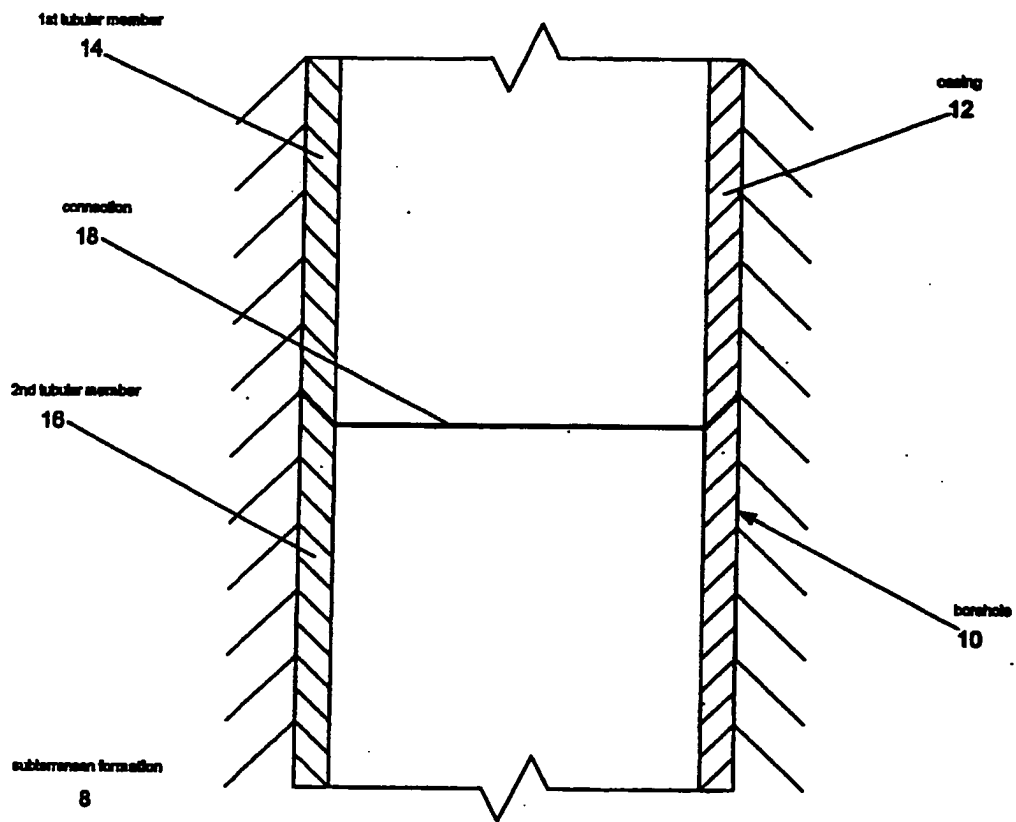
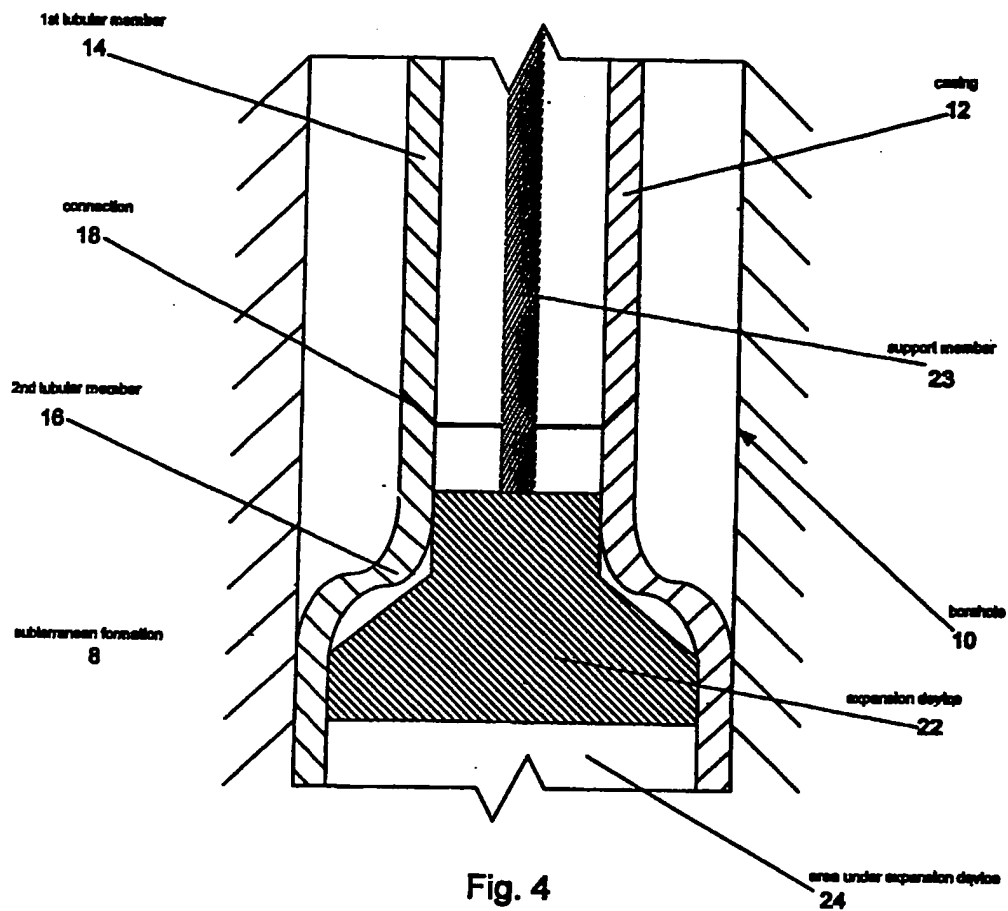


Fig. 3



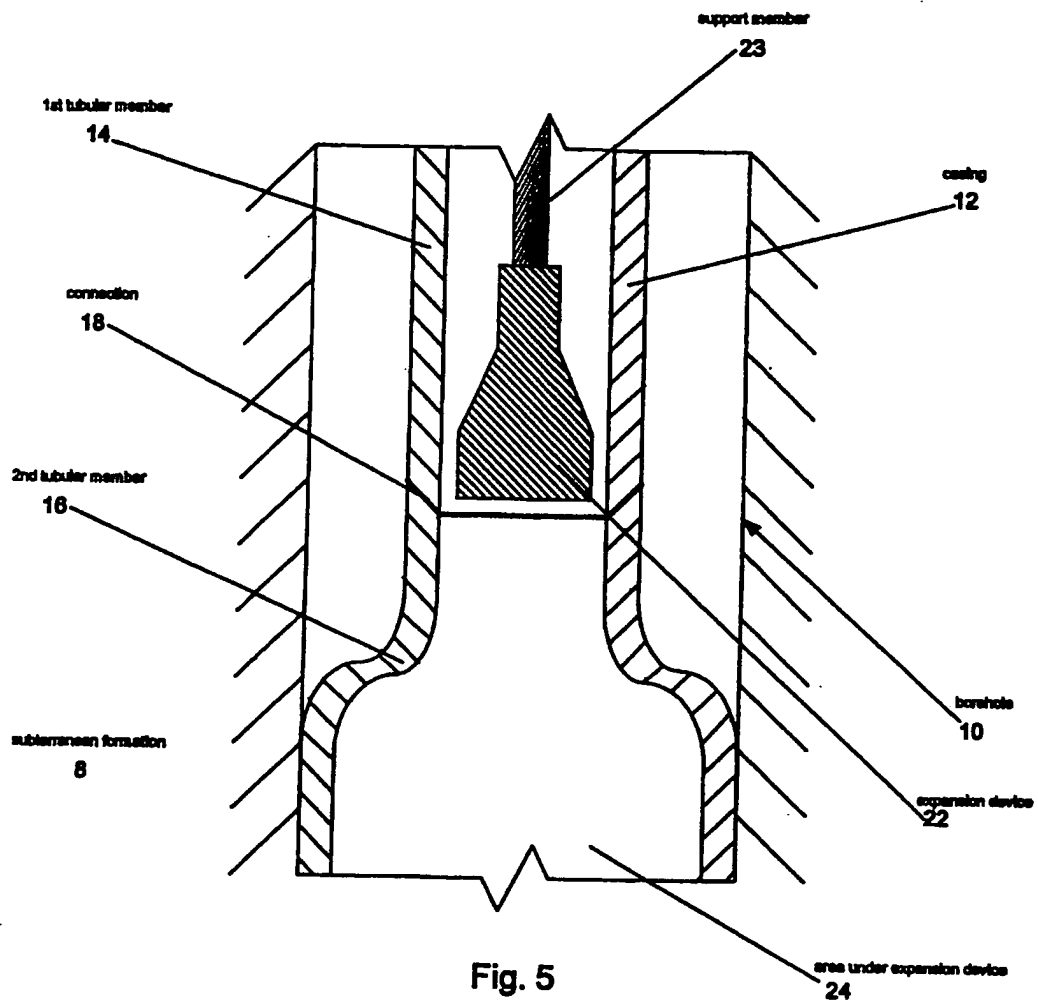


Fig. 5

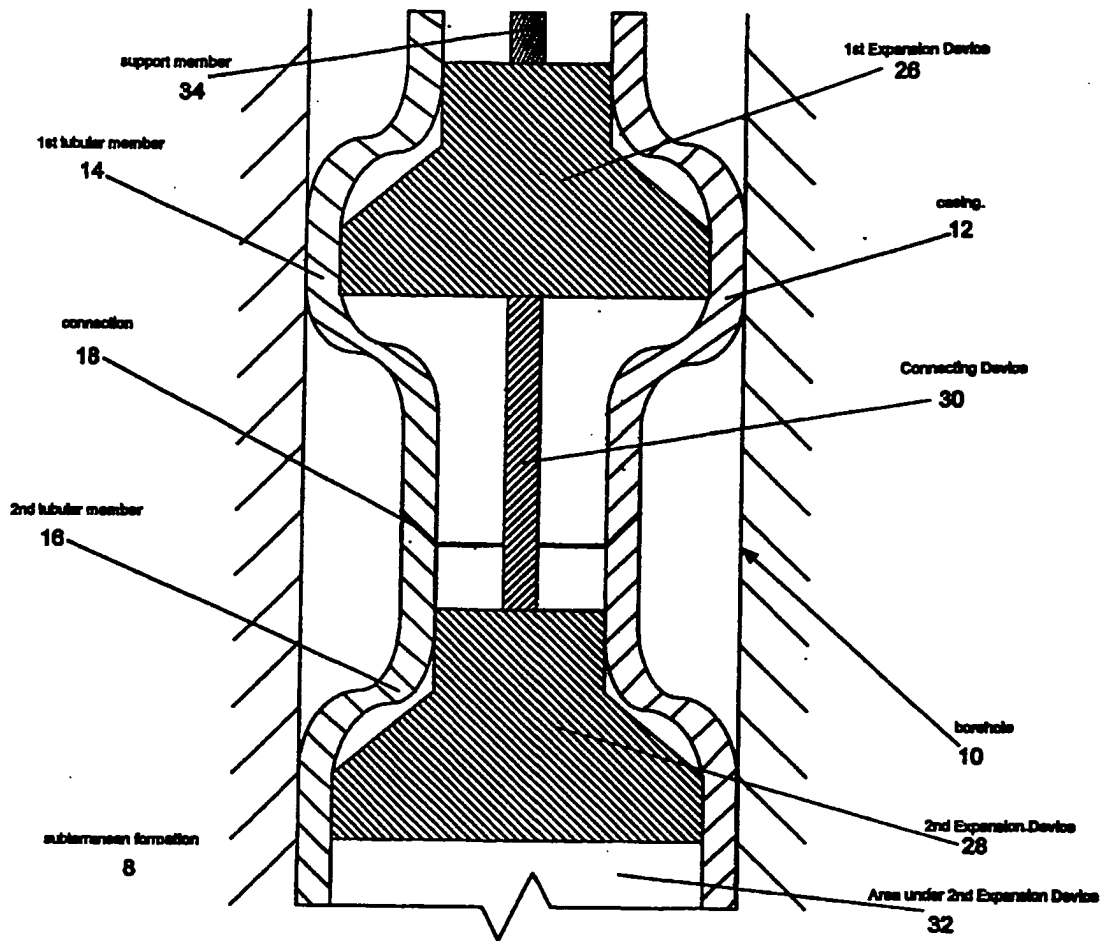


Fig. 6



# A METHOD OF RADIALLY EXPANDING AND PLASTICALLY DEFORMING TUBULAR MEMBERS

## Cross Reference To Related Applications

**[001]** This application claims the benefit of the filing dates of: 1) U.S. provisional patent application serial number 60/499,576, attorney docket number 25791.215, filed on September 2, 2003.

**[002]** The present application is related to the following: (1) U.S. Patent Number 6,497,289, which was filed as U.S. Patent Application serial no. 09/454,139, attorney docket no. 25791.03.02, filed on 12/3/1999, which claims priority from provisional application 60/111,293, filed on 12/7/98, (2) U.S. patent application serial no. 09/510,913, attorney docket no. 25791.7.02, filed on 2/23/2000, which claims priority from provisional application 60/121,702, filed on 2/25/99, (3) U.S. patent application serial no. 09/502,350, attorney docket no. 25791.8.02, filed on 2/10/2000, which claims priority from provisional application 60/119,611, filed on 2/11/99, (4) U.S. patent no. 6,328,113, which was filed as U.S. Patent Application serial number 09/440,338, attorney docket number 25791.9.02, filed on 11/15/99, which claims priority from provisional application 60/108,558, filed on 11/16/98, (5) U.S. patent application serial no. 10/169,434, attorney docket no. 25791.10.04, filed on 7/1/02, which claims priority from provisional application 60/183,546, filed on 2/18/00, (6) U.S. patent application serial no. 09/523,468, attorney docket no. 25791.11.02, filed on 3/10/2000, which claims priority from provisional application 60/124,042, filed on 3/11/99, (7) U.S. patent number 6,568,471, which was filed as patent application serial no. 09/512,895, attorney docket no. 25791.12.02, filed on 2/24/2000, which claims priority from provisional application 60/121,841, filed on 2/26/99, (8) U.S. patent number 6,575,240, which was filed as patent application serial no. 09/511,941, attorney docket no. 25791.16.02, filed on 2/24/2000, which claims priority from provisional application 60/121,907, filed on 2/26/99, (9) U.S. patent number 6,557,640, which was filed as patent application serial no. 09/588,946, attorney docket no. 25791.17.02, filed on 6/7/2000, which claims priority from provisional application 60/137,998, filed on 6/7/99, (10) U.S. patent application serial no. 09/981,916, attorney docket no. 25791.18, filed on 10/18/01 as a continuation-in-part application of U.S. patent no. 6,328,113, which was filed as U.S. Patent Application serial number 09/440,338, attorney docket number 25791.9.02, filed on 11/15/99, which claims priority from provisional application 60/108,558, filed on 11/16/98, (11) U.S. patent number 6,604,763, which was filed as application serial no. 09/559,122, attorney docket no. 25791.23.02, filed on 4/26/2000, which claims priority from provisional application 60/131,106, filed on 4/26/99, (12) U.S. patent application serial no. 10/030,593, attorney docket no. 25791.25.08, filed on 1/8/02, which claims priority from provisional application 60/146,203, filed on 7/29/99, (13) U.S. provisional patent application serial no. 60/143,039, attorney docket no. 25791.26, filed on 7/9/99, (14) U.S. patent application serial no. 10/111,982, attorney docket no.

25791.27.08, filed on 4/30/02, which claims priority from provisional patent application serial no. 60/162,671, attorney docket no. 25791.27, filed on 11/1/1999, (15) U.S. provisional patent application serial no. 60/154,047, attorney docket no. 25791.29, filed on 9/16/1999, (16) U.S. provisional patent application serial no. 60/438,828, attorney docket no. 25791.31, filed on 1/9/03, (17) U.S. patent number 6,564,875, which was filed as application serial no. 09/679,907, attorney docket no. 25791.34.02, on 10/5/00, which claims priority from provisional patent application serial no. 60/159,082, attorney docket no. 25791.34, filed on 10/12/1999, (18) U.S. patent application serial no. 10/089,419, filed on 3/27/02, attorney docket no. 25791.36.03, which claims priority from provisional patent application serial no. 60/159,039, attorney docket no. 25791.36, filed on 10/12/1999, (19) U.S. patent application serial no. 09/679,906, filed on 10/5/00, attorney docket no. 25791.37.02, which claims priority from provisional patent application serial no. 60/159,033, attorney docket no. 25791.37, filed on 10/12/1999, (20) U.S. patent application serial no. 10/303,992, filed on 11/22/02, attorney docket no. 25791.38.07, which claims priority from provisional patent application serial no. 60/212,359, attorney docket no. 25791.38, filed on 6/19/2000, (21) U.S. provisional patent application serial no. 60/165,228, attorney docket no. 25791.39, filed on 11/12/1999, (22) U.S. provisional patent application serial no. 60/455,051, attorney docket no. 25791.40, filed on 3/14/03, (23) PCT application US02/2477, filed on 6/26/02, attorney docket no. 25791.44.02, which claims priority from U.S. provisional patent application serial no. 60/303,711, attorney docket no. 25791.44, filed on 7/6/01, (24) U.S. patent application serial no. 10/311,412, filed on 12/12/02, attorney docket no. 25791.45.07, which claims priority from provisional patent application serial no. 60/221,443, attorney docket no. 25791.45, filed on 7/28/2000, (25) U.S. patent application serial no. 10/, filed on 12/18/02, attorney docket no. 25791.46.07, which claims priority from provisional patent application serial no. 60/221,645, attorney docket no. 25791.46, filed on 7/28/2000, (26) U.S. patent application serial no. 10/322,947, filed on 1/22/03, attorney docket no. 25791.47.03, which claims priority from provisional patent application serial no. 60/233,638, attorney docket no. 25791.47, filed on 9/18/2000, (27) U.S. patent application serial no. 10/406,648, filed on 3/31/03, attorney docket no. 25791.48.06, which claims priority from provisional patent application serial no. 60/237,334, attorney docket no. 25791.48, filed on 10/2/2000, (28) PCT application US02/04353, filed on 2/14/02, attorney docket no. 25791.50.02, which claims priority from U.S. provisional patent application serial no. 60/270,007, attorney docket no. 25791.50, filed on 2/20/2001, (29) U.S. patent application serial no. 10/465,835, filed on 6/13/03, attorney docket no. 25791.51.06, which claims priority from provisional patent application serial no. 60/262,434, attorney docket no. 25791.51, filed on 1/17/2001, (30) U.S. patent application serial no. 10/465,831, filed on 6/13/03, attorney docket no. 25791.52.06, which claims priority from U.S. provisional patent application serial no. 60/259,486, attorney docket no. 25791.52, filed on 1/3/2001, (31) U.S. provisional patent application serial no. 60/452,303, filed on 3/5/03, attorney docket no.

25791.53, (32) U.S. patent number 6,470,966, which was filed as patent application serial number 09/850,093, filed on 5/7/01, attorney docket no. 25791.55, as a divisional application of U.S. Patent Number 6,497,289, which was filed as U.S. Patent Application serial no. 09/454,139, attorney docket no. 25791.03.02, filed on 12/3/1999, which claims priority from provisional application 60/111,293, filed on 12/7/98, (33) U.S. patent number 6,561,227, which was filed as patent application serial number 09/852,026, filed on 5/9/01, attorney docket no. 25791.56, as a divisional application of U.S. Patent Number 6,497,289, which was filed as U.S. Patent Application serial no. 09/454,139, attorney docket no. 25791.03.02, filed on 12/3/1999, which claims priority from provisional application 60/111,293, filed on 12/7/98, (34) U.S. patent application serial number 09/852,027, filed on 5/9/01, attorney docket no. 25791.57, as a divisional application of U.S. Patent Number 6,497,289, which was filed as U.S. Patent Application serial no. 09/454,139, attorney docket no. 25791.03.02, filed on 12/3/1999, which claims priority from provisional application 60/111,293, filed on 12/7/98, (35) PCT Application US02/25608, attorney docket no. 25791.58.02, filed on 8/13/02, which claims priority from provisional application 60/318,021, filed on 9/7/01, attorney docket no. 25791.58, (36) PCT Application US02/24399, attorney docket no. 25791.59.02, filed on 8/1/02, which claims priority from U.S. provisional patent application serial no. 60/313,453, attorney docket no. 25791.59, filed on 8/20/2001, (37) PCT Application US02/29856, attorney docket no. 25791.60.02, filed on 9/19/02, which claims priority from U.S. provisional patent application serial no. 60/326,886, attorney docket no. 25791.60, filed on 10/3/2001, (38) PCT Application US02/20256, attorney docket no. 25791.61.02, filed on 6/26/02, which claims priority from U.S. provisional patent application serial no. 60/303,740, attorney docket no. 25791.61, filed on 7/6/2001, (39) U.S. patent application serial no. 09/962,469, filed on 9/25/01, attorney docket no. 25791.62, which is a divisional of U.S. patent application serial no. 09/523,468, attorney docket no. 25791.11.02, filed on 3/10/2000, which claims priority from provisional application 60/124,042, filed on 3/11/99, (40) U.S. patent application serial no. 09/962,470, filed on 9/25/01, attorney docket no. 25791.63, which is a divisional of U.S. patent application serial no. 09/523,468, attorney docket no. 25791.11.02, filed on 3/10/2000, which claims priority from provisional application 60/124,042, filed on 3/11/99, (41) U.S. patent application serial no. 09/962,471, filed on 9/25/01, attorney docket no. 25791.64, which is a divisional of U.S. patent application serial no. 09/523,468, attorney docket no. 25791.11.02, filed on 3/10/2000, which claims priority from provisional application 60/124,042, filed on 3/11/99, (42) U.S. patent application serial no. 09/962,467, filed on 9/25/01, attorney docket no. 25791.65, which is a divisional of U.S. patent application serial no. 09/523,468, attorney docket no. 25791.11.02, filed on 3/10/2000, which claims priority from provisional application 60/124,042, filed on 3/11/99, (43) U.S. patent application serial no. 09/962,468, filed on 9/25/01, attorney docket no. 25791.66, which is a divisional of U.S. patent application serial no. 09/523,468, attorney docket no. 25791.11.02, filed

on 3/10/2000, which claims priority from provisional application 60/124,042, filed on 3/11/99, (44) PCT application US 02/25727, filed on 8/14/02, attorney docket no. 25791.67.03, which claims priority from U.S. provisional patent application serial no. 60/317,985, attorney docket no. 25791.67, filed on 9/6/2001, and U.S. provisional patent application serial no. 60/318,386, attorney docket no. 25791.67.02, filed on 9/10/2001, (45) PCT application US 02/39425, filed on 12/10/02, attorney docket no. 25791.68.02, which claims priority from U.S. provisional patent application serial no. 60/343,674, attorney docket no. 25791.68, filed on 12/27/2001, (46) U.S. utility patent application serial no. 09/969,922, attorney docket no. 25791.69, filed on 10/3/2001, which is a continuation-in-part application of U.S. patent no. 6,328,113, which was filed as U.S. Patent Application serial number 09/440,338, attorney docket number 25791.9.02, filed on 11/15/99, which claims priority from provisional application 60/108,558, filed on 11/16/98, (47) U.S. utility patent application serial no. 10/516,467, attorney docket no. 25791.70, filed on 12/10/01, which is a continuation application of U.S. utility patent application serial no. 09/969,922, attorney docket no. 25791.69, filed on 10/3/2001, which is a continuation-in-part application of U.S. patent no. 6,328,113, which was filed as U.S. Patent Application serial number 09/440,338, attorney docket number 25791.9.02, filed on 11/15/99, which claims priority from provisional application 60/108,558, filed on 11/16/98, (48) PCT application US 03/00609, filed on 1/9/03, attorney docket no. 25791.71.02, which claims priority from U.S. provisional patent application serial no. 60/357,372, attorney docket no. 25791.71, filed on 2/15/02, (49) U.S. patent application serial no. 10/074,703, attorney docket no. 25791.74, filed on 2/12/02, which is a divisional of U.S. patent number 6,568,471, which was filed as patent application serial no. 09/512,895, attorney docket no. 25791.12.02, filed on 2/24/2000, which claims priority from provisional application 60/121,841, filed on 2/26/99, (50) U.S. patent application serial no. 10/074,244, attorney docket no. 25791.75, filed on 2/12/02, which is a divisional of U.S. patent number 6,568,471, which was filed as patent application serial no. 09/512,895, attorney docket no. 25791.12.02, filed on 2/24/2000, which claims priority from provisional application 60/121,841, filed on 2/26/99, (51) U.S. patent application serial no. 10/076,660, attorney docket no. 25791.76, filed on 2/15/02, which is a divisional of U.S. patent number 6,568,471, which was filed as patent application serial no. 09/512,895, attorney docket no. 25791.12.02, filed on 2/24/2000, which claims priority from provisional application 60/121,841, filed on 2/26/99, (52) U.S. patent application serial no. 10/076,661, attorney docket no. 25791.77, filed on 2/15/02, which is a divisional of U.S. patent number 6,568,471, which was filed as patent application serial no. 09/512,895, attorney docket no. 25791.12.02, filed on 2/24/2000, which claims priority from provisional application 60/121,841, filed on 2/26/99, (53) U.S. patent application serial no. 10/076,659, attorney docket no. 25791.78, filed on 2/15/02, which is a divisional of U.S. patent number 6,568,471, which was filed as patent application serial no. 09/512,895, attorney docket no. 25791.12.02, filed on 2/24/2000, which claims priority from provisional application

60/121,841, filed on 2/26/99, (54) U.S. patent application serial no. 10/078,928, attorney docket no. 25791.79, filed on 2/20/02, which is a divisional of U.S. patent number 6,568,471, which was filed as patent application serial no. 09/512,895, attorney docket no. 25791.12.02, filed on 2/24/2000, which claims priority from provisional application 60/121,841, filed on 2/26/99, (55) U.S. patent application serial no. 10/078,922, attorney docket no. 25791.80, filed on 2/20/02, which is a divisional of U.S. patent number 6,568,471, which was filed as patent application serial no. 09/512,895, attorney docket no. 25791.12.02, filed on 2/24/2000, which claims priority from provisional application 60/121,841, filed on 2/26/99, (56) U.S. patent application serial no. 10/078,921, attorney docket no. 25791.81, filed on 2/20/02, which is a divisional of U.S. patent number 6,568,471, which was filed as patent application serial no. 09/512,895, attorney docket no. 25791.12.02, filed on 2/24/2000, which claims priority from provisional application 60/121,841, filed on 2/26/99, (57) U.S. patent application serial no. 10/261,928, attorney docket no. 25791.82, filed on 10/1/02, which is a divisional of U.S. patent number 6,557,640, which was filed as patent application serial no. 09/588,946, attorney docket no. 25791.17.02, filed on 6/7/2000, which claims priority from provisional application 60/137,998, filed on 6/7/99, (58) U.S. patent application serial no. 10/079,276, attorney docket no. 25791.83, filed on 2/20/02, which is a divisional of U.S. patent number 6,568,471, which was filed as patent application serial no. 09/512,895, attorney docket no. 25791.12.02, filed on 2/24/2000, which claims priority from provisional application 60/121,841, filed on 2/26/99, (59) U.S. patent application serial no. 10/262,009, attorney docket no. 25791.84, filed on 10/1/02, which is a divisional of U.S. patent number 6,557,640, which was filed as patent application serial no. 09/588,946, attorney docket no. 25791.17.02, filed on 6/7/2000, which claims priority from provisional application 60/137,998, filed on 6/7/99, (60) U.S. patent application serial no. 10/092,481, attorney docket no. 25791.85, filed on 3/7/02, which is a divisional of U.S. patent number 6,568,471, which was filed as patent application serial no. 09/512,895, attorney docket no. 25791.12.02, filed on 2/24/2000, which claims priority from provisional application 60/121,841, filed on 2/26/99, (61) U.S. patent application serial no. 10/261,926, attorney docket no. 25791.86, filed on 10/1/02, which is a divisional of U.S. patent number 6,557,640, which was filed as patent application serial no. 09/588,946, attorney docket no. 25791.17.02, filed on 6/7/2000, which claims priority from provisional application 60/137,998, filed on 6/7/99, (62) PCT application US 02/36157, filed on 11/12/02, attorney docket no. 25791.87.02, which claims priority from U.S. provisional patent application serial no. 60/338,996, attorney docket no. 25791.87, filed on 11/12/01, (63) PCT application US 02/36267, filed on 11/12/02, attorney docket no. 25791.88.02, which claims priority from U.S. provisional patent application serial no. 60/339,013, attorney docket no. 25791.88, filed on 11/12/01, (64) PCT application US 03/11785, filed on 4/16/03, attorney docket no. 25791.89.02, which claims priority from U.S. provisional patent application serial no. 60/383,917, attorney docket no. 25791.89, filed on 5/29/02, (65) PCT application US 03/15020,

filed on 5/12/03, attorney docket no. 25791.90.02, which claims priority from U.S. provisional patent application serial no. 60/391,703, attorney docket no. 25791.90, filed on 6/26/02, (66) PCT application US 02/39418, filed on 12/10/02, attorney docket no. 25791.92.02, which claims priority from U.S. provisional patent application serial no. 60/346,309, attorney docket no. 25791.92, filed on 1/7/02, (67) PCT application US 03/06544, filed on 3/4/03, attorney docket no. 25791.93.02, which claims priority from U.S. provisional patent application serial no. 60/372,048, attorney docket no. 25791.93, filed on 4/12/02, (68) U.S. patent application serial no. 10/331,718, attorney docket no. 25791.94, filed on 12/30/02, which is a divisional U.S. patent application serial no. 09/679,906, filed on 10/5/00, attorney docket no. 25791.37.02, which claims priority from provisional patent application serial no. 60/159,033, attorney docket no. 25791.37, filed on 10/12/1999, (69) PCT application US 03/04837, filed on 2/29/03, attorney docket no. 25791.95.02, which claims priority from U.S. provisional patent application serial no. 60/363,829, attorney docket no. 25791.95, filed on 3/13/02, (70) U.S. patent application serial no. 10/261,927, attorney docket no. 25791.97, filed on 10/1/02, which is a divisional of U.S. patent number 6,557,640, which was filed as patent application serial no. 09/588,946, attorney docket no. 25791.17.02, filed on 6/7/2000, which claims priority from provisional application 60/137,998, filed on 6/7/99, (71) U.S. patent application serial no. 10/262,008, attorney docket no. 25791.98, filed on 10/1/02, which is a divisional of U.S. patent number 6,557,640, which was filed as patent application serial no. 09/588,946, attorney docket no. 25791.17.02, filed on 6/7/2000, which claims priority from provisional application 60/137,998, filed on 6/7/99, (72) U.S. patent application serial no. 10/261,925, attorney docket no. 25791.99, filed on 10/1/02, which is a divisional of U.S. patent number 6,557,640, which was filed as patent application serial no. 09/588,946, attorney docket no. 25791.17.02, filed on 6/7/2000, which claims priority from provisional application 60/137,998, filed on 6/7/99, (73) U.S. patent application serial no. 10/199,524, attorney docket no. 25791.100, filed on 7/19/02, which is a continuation of U.S. Patent Number 6,497,289, which was filed as U.S. Patent Application serial no. 09/454,139, attorney docket no. 25791.03.02, filed on 12/3/1999, which claims priority from provisional application 60/111,293, filed on 12/7/98, (74) PCT application US 03/10144, filed on 3/28/03, attorney docket no. 25791.101.02, which claims priority from U.S. provisional patent application serial no. 60/372,632, attorney docket no. 25791.101, filed on 4/15/02, (75) U.S. provisional patent application serial no. 60/412,542, attorney docket no. 25791.102, filed on 9/20/02, (76) PCT application US 03/14153, filed on 5/6/03, attorney docket no. 25791.104.02, which claims priority from U.S. provisional patent application serial no. 60/380,147, attorney docket no. 25791.104, filed on 5/6/02, (77) PCT application US 03/19993, filed on 6/24/03, attorney docket no. 25791.106.02, which claims priority from U.S. provisional patent application serial no. 60/397,284, attorney docket no. 25791.106, filed on 7/19/02, (78) PCT application US 03/13787, filed on 5/5/03, attorney docket no. 25791.107.02, which claims priority from U.S. provisional

patent application serial no. 60/387,486 , attorney docket no. 25791.107, filed on 6/10/02, (79) PCT application US 03/18530, filed on 6/11/03, attorney docket no. 25791.108.02, which claims priority from U.S. provisional patent application serial no. 60/387,961, attorney docket no. 25791.108, filed on 6/12/02, (80) PCT application US 03/20694, filed on 7/1/03, attorney docket no. 25791.110.02, which claims priority from U.S. provisional patent application serial no. 60/398,061, attorney docket no. 25791.110, filed on 7/24/02, (81) PCT application US 03/20870, filed on 7/2/03, attorney docket no. 25791.111.02, which claims priority from U.S. provisional patent application serial no. 60/399,240, attorney docket no. 25791.111, filed on 7/29/02, (82) U.S. provisional patent application serial no. 60/412,487, attorney docket no. 25791.112, filed on 9/20/02, (83) U.S. provisional patent application serial no. 60/412,488, attorney docket no. 25791.114, filed on 9/20/02, (84) U.S. patent application serial no. 10/280,356, attorney docket no. 25791.115, filed on 10/25/02, which is a continuation of U.S. patent number 6,470,966, which was filed as patent application serial number 09/850,093, filed on 5/7/01, attorney docket no. 25791.55, as a divisional application of U.S. Patent Number 6,497,289, which was filed as U.S. Patent Application serial no. 09/454,139, attorney docket no. 25791.03.02, filed on 12/3/1999, which claims priority from provisional application 60/111,293, filed on 12/7/98, (85) U.S. provisional patent application serial no. 60/412,177, attorney docket no. 25791.117, filed on 9/20/02, (86) U.S. provisional patent application serial no. 60/412,653, attorney docket no. 25791.118, filed on 9/20/02, (87) U.S. provisional patent application serial no. 60/405,610, attorney docket no. 25791.119, filed on 8/23/02, (88) U.S. provisional patent application serial no. 60/405,394, attorney docket no. 25791.120, filed on 8/23/02, (89) U.S. provisional patent application serial no. 60/412,544, attorney docket no. 25791.121, filed on 9/20/02, (90) PCT application US 03/24779, filed on 8/8/03, attorney docket no. 25791.125.02, which claims priority from U.S. provisional patent application serial no. 60/407,442, attorney docket no. 25791.125, filed on 8/30/02, (91) U.S. provisional patent application serial no. 60/423,363, attorney docket no. 25791.126, filed on 12/10/02, (92) U.S. provisional patent application serial no. 60/412,196, attorney docket no. 25791.127, filed on 9/20/02, (93) U.S. provisional patent application serial no. 60/412,187, attorney docket no. 25791.128, filed on 9/20/02, (94) U.S. provisional patent application serial no. 60/412,371, attorney docket no. 25791.129, filed on 9/20/02, (95) U.S. patent application serial no. 10/382,325, attorney docket no. 25791.145, filed on 3/5/03, which is a continuation of U.S. patent number 6,557,640, which was filed as patent application serial no. 09/588,946, attorney docket no. 25791.17.02, filed on 6/7/2000, which claims priority from provisional application 60/137,998, filed on 6/7/99, (96) U.S. patent application serial no. 10/624,842, attorney docket no. 25791.151, filed on 7/22/03, which is a divisional of U.S. patent application serial no. 09/502,350, attorney docket no. 25791.8.02, filed on 2/10/2000, which claims priority from provisional application 60/119,611, filed on 2/11/99, (97) U.S. provisional patent application serial no. 60/431,184, attorney docket no. 25791.157, filed on


12/5/02, (98) U.S. provisional patent application serial no. 60/448,526, attorney docket no. 25791.185, filed on 2/18/03, (99) U.S. provisional patent application serial no. 60/461,539, attorney docket no. 25791.186, filed on 4/9/03, (100) U.S. provisional patent application serial no. 60/462,750, attorney docket no. 25791.193, filed on 4/14/03, (101) U.S. provisional patent application serial no. 60/436,106, attorney docket no. 25791.200, filed on 12/23/02, (102) U.S. provisional patent application serial no. 60/442,942, attorney docket no. 25791.213, filed on 1/27/03, (103) U.S. provisional patent application serial no. 60/442,938, attorney docket no. 25791.225, filed on 1/27/03, (104) U.S. provisional patent application serial no. 60/418,687, attorney docket no. 25791.228, filed on 4/18/03, (105) U.S. provisional patent application serial no. 60/454,896, attorney docket no. 25791.236, filed on 3/14/03, (106) U.S. provisional patent application serial no. 60/450,504, attorney docket no. 25791.238, filed on 2/26/03, (107) U.S. provisional patent application serial no. 60/451,152, attorney docket no. 25791.239, filed on 3/9/03, (108) U.S. provisional patent application serial no. 60/455,124, attorney docket no. 25791.241, filed on 3/17/03, (109) U.S. provisional patent application serial no. 60/453,678, attorney docket no. 25791.253, filed on 3/11/03, (110) U.S. patent application serial no. 10/421,682, attorney docket no. 25791.256, filed on 4/23/03, which is a continuation of U.S. patent application serial no. 09/523,468, attorney docket no. 25791.11.02, filed on 3/10/2000, which claims priority from provisional application 60/124,042, filed on 3/11/99, (111) U.S. provisional patent application serial no. 60/457,965, attorney docket no. 25791.260, filed on 3/27/03, (112) U.S. provisional patent application serial no. 60/455,718, attorney docket no. 25791.262, filed on 3/18/03, (113) U.S. patent number 6,550,821, which was filed as patent application serial no. 09/811,734, filed on 3/19/01, (114) U.S. patent application serial no. 10/436,467, attorney docket no. 25791.268, filed on 5/12/03, which is a continuation of U.S. patent number 6,604,763, which was filed as application serial no. 09/559,122, attorney docket no. 25791.23.02, filed on 4/26/2000, which claims priority from provisional application 60/131,106, filed on 4/26/99, (115) U.S. provisional patent application serial no. 60/459,776, attorney docket no. 25791.270, filed on 4/2/03, (116) U.S. provisional patent application serial no. 60/461,094, attorney docket no. 25791.272, filed on 4/8/03, (117) U.S. provisional patent application serial no. 60/461,038, attorney docket no. 25791.273, filed on 4/7/03, (118) U.S. provisional patent application serial no. 60/463,586, attorney docket no. 25791.277, filed on 4/17/03, (119) U.S. provisional patent application serial no. 60/472,240, attorney docket no. 25791.286, filed on 5/20/03, (120) U.S. patent application serial no. 10/619,285, attorney docket no. 25791.292, filed on 7/14/03, which is a continuation-in-part of U.S. utility patent application serial no. 09/969,922, attorney docket no. 25791.69, filed on 10/3/2001, which is a continuation-in-part application of U.S. patent no. 6,328,113, which was filed as U.S. Patent Application serial number 09/440,338, attorney docket number 25791.9.02, filed on 11/15/99, which claims priority from provisional application 60/108,558, filed on 11/16/98, (121) U.S. provisional patent



#### Field of the Invention

**[003]** This invention relates to expandable tubular members, and in particular to a method of expanding tubular members.

#### Background



**[004]** Conventionally, when a wellbore is created, a number of casings are installed in the borehole to prevent collapse of the borehole wall and to prevent undesired outflow of drilling fluid into the formation or inflow of fluid from the formation into the borehole. The borehole is drilled in intervals whereby a casing which is to be installed in a lower borehole interval is lowered through a previously installed casing of an upper borehole interval. As a consequence of this procedure the casing of the lower interval is of a smaller diameter than the casing of the upper interval. Thus, the casings are in a nested arrangement with casing diameters decreasing in a downward direction. Cement annuli may be provided between the outer surfaces of the casings and the borehole wall to seal the casings from the borehole wall. As a consequence of this nested arrangement a relatively large borehole diameter is required at the upper part of the wellbore. Such a large borehole diameter involves increased costs due to heavy casing handling equipment, large drill bits and increased volumes of drilling fluid and drill cuttings. Moreover, increased drilling rig time is involved due to required cement pumping, cement hardening, required equipment changes due to large variations in hole diameters drilled in the course of the well, and the large volume of cuttings drilled and removed.

**[005]** In order to avoid the nested arrangement of casing as discussed above, wellbore casings may be formed in the wellbore by radially expanding and plastically deforming tubular members in the borehole. These tubular members are often coupled to one another by threaded connections. The threaded engagement between properly secured tubular members in a conventional casing joint is effective in maintaining a secure mechanical connection that holds the string together and effectively seals the internal casing area from the formation wellbore environment. When the casing string and connection are enlarged radially, a conventional connection changes dimensionally in a way that can prevent the engaged components of the connection from properly engaging and sealing. The radial expansion of a conventional connection may weaken or otherwise damage the connection sufficiently to permit mechanical separation or leakage in the connection.

**[006]** Furthermore, if a first tubular member is connected to a second tubular member, and then radially expanded and plastically deformed while the connection between the first tubular member and the second tubular member is in compression, the connection may fail during and/or after the radial expansion and plastic deformation.

**[007]** What is needed is a new method and apparatus to expand a tubular connection.

**[007A]** According to an aspect of the present invention, there is provided a method of creating a casing in a borehole located in a subterranean formation, comprising: installing the casing in the borehole, the casing comprising a first tubular member, a second tubular member, and a threaded connection coupling the first tubular member to the second tubular member; radially expanding and plastically deforming a portion of the first tubular member and a portion of the second tubular member; and radially expanding and plastically deforming the threaded connection after radially expanding and plastically deforming the portions of the first and second tubular members.

**[007B]** Preferably, radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion with an expandable expansion device.

**[007C]** Preferably, radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion with an expansion device comprising rotating elements.

**[007D]** Preferably, radially expanding and plastically deforming the threaded connection comprises radially expanding and plastically deforming the connection with an expansion cone.

**[007E]** Preferably, radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion with a first expansion device, and wherein radially expanding and plastically deforming the threaded connection comprises radially expanding and plastically deforming the connection with a second expansion device.

**[007F]** Preferably, radially expanding and plastically deforming the first and second tubular member portions places the threaded connection in tension before radially expanding and plastically deforming the threaded connection.

**[007G]** Preferably, radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion into engagement with at least one of a pre-existing structure and the borehole.

**[007H]** Preferably, the threaded connection is a first threaded connection, wherein the casing further comprises a third tubular member and a second threaded connection coupling the second tubular member to the third tubular member, and the method further comprises radially expanding and plastically deforming a portion of the third tubular member and then radially expanding and plastically deforming the second threaded connection.

**[007I]** Preferably, radially expanding and plastically deforming the portion of the third tubular member comprises radially expanding and plastically deforming the portion with an expandable expansion device.

- [007J]** Preferably, radially expanding and plastically deforming the second threaded connection comprises radially expanding and plastically deforming the connection with an expansion cone.
- [007K]** Preferably, radially expanding and plastically deforming the second and third tubular member portions comprises placing the second threaded connection in tension.
- [007L]** Preferably, radially expanding and plastically deforming the portion of the third tubular member comprises radially expanding and plastically deforming the portion into engagement with at least one of a pre-existing structure and the borehole.
- [007M]** Preferably, the threaded connection comprises a pin and a box member.
- [007N]** According to a second aspect of the present invention, there is provided an expanded casing in a borehole located in a subterranean formation, comprising: a first tubular member, a second tubular member, and a threaded connection coupling the first tubular member to the second tubular member, the casing produced by the process of: installing the casing in the borehole; radially expanding and plastically deforming a portion of the first tubular member; radially expanding and plastically deforming a portion of the second tubular member; and radially expanding and plastically deforming the threaded connection after radially expanding and plastically deforming the first and second tubular member portions.
- [007O]** Preferably, radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion with an expandable expansion device.
- [007P]** Preferably, radially expanding and plastically deforming the threaded connection comprises radially expanding and plastically deforming the connection with an expansion cone.
- [007Q]** Preferably, radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion with a first expansion device, and radially expanding and plastically deforming the threaded connection comprises radially expanding and plastically deforming the connection with a second expansion device.
- [007R]** Preferably, radially expanding and plastically deforming the first and second tubular member portions places the threaded connection in tension before radially expanding and plastically deforming the threaded connection.
- [007S]** Preferably, radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion into engagement with at least one of a pre-existing structure and the borehole.
- [007T]** According to a third aspect of the present invention, there is provided a system for creating a casing in a borehole located in a subterranean formation, comprising: means for

installing the casing in the borehole, the casing comprising a first tubular member, a second tubular member, and a threaded connection coupling the first tubular member to the second tubular member; means for radially expanding and plastically deforming a portion of the first tubular member and a portion of the second tubular member; and means for radially expanding and plastically deforming the threaded connection after radially expanding and plastically deforming the portions of the first and second tubular members.

**[007U]** Preferably, the means for radially expanding and plastically deforming at least one of the first and second tubular member portions comprises an expandable expansion device.

**[007V]** Preferably, the means for radially expanding and plastically deforming at least one of the first and second tubular member portions comprises an expansion device comprising rotating elements.

**[007W]** Preferably, the means for radially expanding and plastically deforming the threaded connection comprises an expansion cone.

**[007X]** Preferably, the means for radially expanding and plastically deforming at least one of the first and second tubular member portions comprises a first expansion device, and the means for radially expanding and plastically deforming the threaded connection comprises a second expansion device.

**[007Y]** Preferably, the means for radially expanding and plastically deforming the first and second tubular member portions comprises means for placing the threaded connection in tension before radially expanding and plastically deforming the threaded connection.

**[007Z]** Preferably, the means for radially expanding and plastically deforming at least one of the first and second tubular member portions comprises means for radially expanding and plastically deforming the portion into engagement with at least one of a pre-existing structure and the borehole.

**[007AA]** Preferably, the threaded connection comprises a pin and a box member.

### Brief Description of the Drawings

[008] Fig. 1 is a sectional view through a borehole illustrating a string of casing run in a borehole prior to being radially expanded and plastically deformed.

[009] Fig. 2 is a sectional view through a borehole illustrating a string of casing that has been partially radially expanded and plastically deformed.

[0010] Fig. 3 is a sectional view through a borehole illustrating a string of casing that has been radially expanded and plastically deformed.

[0011] Fig. 4 is a sectional view through a borehole illustrating a string of casing being radially expanded and plastically deformed with an expansion device.

[0012] Fig. 5 is a sectional view through a borehole illustrating a partially expanded string of casing and an expandable expansion device.

[0013] Fig. 6 is a sectional view through a borehole illustrating a string of casing being radially expanded and plastically deformed with two expansion devices.

### Detailed Description

[0014] Referring to Fig. 1, there is illustrated a subterranean formation 8, and a borehole 10 positioned in the subterranean formation. As a first step, a string of casing 12 is positioned within the borehole 10. The string of casing 12 includes a first tubular member 14 and a second tubular member 16. The first tubular member 14 and the second tubular member 16 are connected by a conventional mechanical connection 18, for example a conventional threaded connection.

[0015] Referring to Fig. 2, a second step is illustrated where a portion of the first tubular member 14 above the connection 18 has been radially expanded and plastically deformed into engagement with the borehole 10, and a portion of the second tubular member 16 below the connection 18 has been radially expanded and plastically deformed into engagement with the borehole 10. The connection 18 has not been radially expanded and plastically deformed.

[0016] The connection 18 is shown in tension. The first tubular member 14 is exerting a force on the connection 18 in the direction of an arrow 20. The second tubular member 16 is exerting a force on the connection 18 in the direction of an arrow 22.

[0017] It is understood that the connection 18 is in tension because as a portion of the first tubular member 14 is expanded and plastically deformed in a radial direction into engagement with the borehole 10, that portion contracts in an axial direction due to Poisson's ratio, and exerts a tensional force on the connection. Alternatively, the connection 18 is in tension because as a portion of the second tubular member 16 is expanded and plastically deformed in a radial direction into engagement with the borehole 10, that portion contracts in an axial direction due to Poisson's ratio, and exerts a tensional force on the connection. It is understood that both the first tubular member 14 and the second tubular member 16 are held stationary, for example by being expanded into engagement with the borehole 10, in order for the connection 18 to be in

tension. If either the first tubular member 14 or the second tubular member 16 were not held stationary, there would be no tensional force in the connection 18, because the tubular members would move in the direction of the tensional force to relieve the force.

[0018] Referring to Fig. 3, a third step is illustrated where the string of casing 12 has been radially expanded and plastically deformed within the borehole 10. The first tubular member 14 and the second tubular member 16 were radially expanded and plastically deformed into engagement with the borehole 10, as shown in Fig. 2, and then the connection 18 was radially expanded and plastically deformed, as shown in Fig. 3.

[0019] Referring to Fig. 4, there is illustrated a first part of a technique of radially expanding and plastically deforming the string of casing 12 of Fig. 1. An expansion device 22 is used to radially expand and plastically deform portions of the string of casing 12.

[0020] It is understood that suitable expansion devices for the expansion device 22 include conventional expansion devices adjustable between a small diameter configuration and a large diameter configuration. It is also understood that when the expansion device 22 is in the small diameter configuration, the expansion device can fit through the unexpanded connection 18, as shown in Figs. 1 and 2; and when the expansion device is in the large diameter configuration, the expansion device can expand a portion of the first tubular member 14, second tubular member 16, and/or the connection 18, as shown in Figs. 2 and 3.

[0021] Referring again to Fig. 4, a first part of the technique is illustrated where a portion of the second tubular member 16 below the connection 18 is being radially expanded and plastically deformed by the expansion device 22. The expansion device 22 is shown in the large diameter configuration. The expansion device 22 is mounted to a support number 23. It is understood that an area 24 under the expansion device 22 may be pressurized to force the expansion device towards the connection 18 and the first tubular member 14. Alternatively, the expansion device 22 may be pulled by the support member 23 towards the connection 18 and the first tubular member 14.

[0022] It is understood that the expansion device 22 may be lowered through the string of casing 12 in the small diameter configuration, then the expansion device may be expanded to the large diameter configuration, and used to expand a portion of the second tubular member 16. Alternatively, the expansion device 22 may start in the large diameter configuration, and the string of casing 12 may be placed over the support number 23, so that the expansion device is at the bottom of the string of casing, then the expansion device can be pulled through the second tubular member 16 to radially expand and plastically deform the second tubular member.

[0023] Referring to Fig. 5, a second part of the technique is illustrated where the expansion device 22 is in a small diameter configuration moving through the connection 18. It is understood that the expansion device 22 may be used to radially expand and plastically deform a portion of the second tubular member 16 while in a large diameter configuration during the first

part of the technique as illustrated in Fig. 4, then be collapsed into a small diameter configuration and be pulled through the connection 18 by the support number 23, during the second part of the technique as illustrated in Fig. 5.

[0024] It is also understood that after being pulled through the connection 18 and into the first tubular member 14, the expansion device 22 may be re-expanded into the large diameter configuration and used to radially expand and plastically deform a portion of the first tubular member 14, during a third part of the technique.

[0025] After a portion of the second tubular member 16 and a portion of the first tubular member 14 have been radially expanded and plastically deformed with the expansion device 22 in the above described manner, the connection 18 may be radially expanded and plastically deformed with the expansion device 22 or with another expansion device (not shown), during a fourth part of the technique.

[0026] Referring to Fig. 6, there is illustrated a second technique of radially expanding and plastically deforming the string of casing 12 of Fig. 1. A portion of the string of casing 12 is radially expanded and plastically performed with a first expansion device 26 and a second expansion device 28. The first expansion device 26 is mounted on a support member 34. The second expansion device 28 is connected to the first expansion device 26 in a conventional manner by a connecting device 30.

[0027] It is understood that the first expansion device 26 is expandable between a small diameter configuration and a large diameter configuration, while the second expansion device 28 may or may not be expandable between a small diameter configuration and a large diameter configuration.

[0028] In operation, during a first part of the second technique, the first expansion device 26 is used to radially expand and plastically deform a portion of the second tubular member 16 while in a large diameter configuration. During a second part of the second technique, the first expansion device 26 is then retracted into a small diameter configuration and moved through the connection 18. During a third part of the second technique, the first expansion device 26 is expanded into a large diameter configuration and used to radially expand and plastically deform a portion of the first tubular member 14, after moving through the connection 18.

[0029] The second expansion device 28 is pulled by the connecting device 30 behind the first expansion device 26. It is understood that the second expansion device 28 has a fixed diameter. Alternatively, the second expansion device 28 is movable between a first small diameter configuration and a second large diameter configuration.

[0030] After the first expansion device 26 has radially expanded and plastically deformed a portion of the second tubular member 16 and a portion of the first tubular member 14 during the third part of the second technique, during a fourth part the second expansion device 28 is pulled through the connection 18 by the connecting device 30, and the second expansion device

radially expands and plastically deforms the connection. After moving the first expansion device 26 and the second expansion device 28 through the string of casing 12 (shown in Fig. 6) using the second technique, the string of casing may look like the string of casing 12 as illustrated in Fig. 3.

**[0031]** It is understood that the first expansion device 26 and the second expansion device 28 may be moved through the string of casing 12 by pulling them with the support member 34. Alternatively, the first expansion device 26 and the second expansion device 28 are moved through the string of casing 12 by pressurizing an area 32 under the second expansion device, which pushes the second expansion device, the connecting device 30, and the first expansion device.

**[0032]** According to an aspect of the present invention, there is provided a method of creating a casing in a borehole located in a subterranean formation, comprising: installing the casing in the borehole, the casing comprising a first tubular member, a second tubular member, and a threaded connection coupling the first tubular member to the second tubular member; radially expanding and plastically deforming a portion of the first tubular member and a portion of the second tubular member; and radially expanding and plastically deforming the threaded connection after radially expanding and plastically deforming the portions of the first and second tubular members.

**[0033]** Preferably, radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion with an expandable expansion device.

**[0034]** Preferably, radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion with an expansion device comprising rotating elements.

**[0035]** Preferably, radially expanding and plastically deforming the threaded connection comprises radially expanding and plastically deforming the connection with an expansion cone.

**[0036]** Preferably, radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion with a first expansion device, and wherein radially expanding and plastically deforming the threaded connection comprises radially expanding and plastically deforming the connection with a second expansion device.

**[0037]** Preferably, radially expanding and plastically deforming the first and second tubular member portions places the threaded connection in tension before radially expanding and plastically deforming the threaded connection.

**[0038]** Preferably, radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion into engagement with at least one of a pre-existing structure and the borehole.



**[0039]** Preferably, the threaded connection is a first threaded connection, wherein the casing further comprises a third tubular member and a second threaded connection coupling the second tubular member to the third tubular member, and the method further comprises radially expanding and plastically deforming a portion of the third tubular member and then radially expanding and plastically deforming the second threaded connection.

**[0040]** Preferably, radially expanding and plastically deforming the portion of the third tubular member comprises radially expanding and plastically deforming the portion with an expandable expansion device.

**[0041]** Preferably, radially expanding and plastically deforming the second threaded connection comprises radially expanding and plastically deforming the connection with an expansion cone.

**[0042]** Preferably, radially expanding and plastically deforming the second and third tubular member portions comprises placing the second threaded connection in tension.

**[0043]** Preferably, radially expanding and plastically deforming the portion of the third tubular member comprises radially expanding and plastically deforming the portion into engagement with at least one of a pre-existing structure and the borehole.

**[0044]** Preferably, the threaded connection comprises a pin and a box member.

**[0045]** According to a second aspect of the present invention, there is provided an expanded casing in a borehole located in a subterranean formation, comprising: a first tubular member, a second tubular member, and a threaded connection coupling the first tubular member to the second tubular member, the casing produced by the process of: installing the casing in the borehole; radially expanding and plastically deforming a portion of the first tubular member; radially expanding and plastically deforming a portion of the second tubular member; and radially expanding and plastically deforming the threaded connection after radially expanding and plastically deforming the first and second tubular member portions.

**[0046]** Preferably, radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion with an expandable expansion device.

**[0047]** Preferably, radially expanding and plastically deforming the threaded connection comprises radially expanding and plastically deforming the connection with an expansion cone.

**[0048]** Preferably, radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion with a first expansion device, and radially expanding and plastically deforming the threaded connection comprises radially expanding and plastically deforming the connection with a second expansion device.

**[0049]** Preferably, radially expanding and plastically deforming the first and second tubular member portions places the threaded connection in tension before radially expanding and plastically deforming the threaded connection.

**[0050]** Preferably, radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion into engagement with at least one of a pre-existing structure and the borehole.

**[0051]** According to a third aspect of the present invention, there is provided a system for creating a casing in a borehole located in a subterranean formation, comprising: means for installing the casing in the borehole, the casing comprising a first tubular member, a second tubular member, and a threaded connection coupling the first tubular member to the second tubular member; means for radially expanding and plastically deforming a portion of the first tubular member and a portion of the second tubular member; and means for radially expanding and plastically deforming the threaded connection after radially expanding and plastically deforming the portions of the first and second tubular members.

**[0052]** Preferably, the means for radially expanding and plastically deforming at least one of the first and second tubular member portions comprises an expandable expansion device.

**[0053]** Preferably, the means for radially expanding and plastically deforming at least one of the first and second tubular member portions comprises an expansion device comprising rotating elements.


**[0054]** Preferably, the means for radially expanding and plastically deforming the threaded connection comprises an expansion cone.

**[0055]** Preferably, the means for radially expanding and plastically deforming at least one of the first and second tubular member portions comprises a first expansion device, and the means for radially expanding and plastically deforming the threaded connection comprises a second expansion device.

**[0056]** **[007Y]** Preferably, the means for radially expanding and plastically deforming the first and second tubular member portions comprises means for placing the threaded connection in tension before radially expanding and plastically deforming the threaded connection.

**[0057]** Preferably, the means for radially expanding and plastically deforming at least one of the first and second tubular member portions comprises means for radially expanding and plastically deforming the portion into engagement with at least one of a pre-existing structure and the borehole.

**[0058]** Preferably, the threaded connection comprises a pin and a box member.



**[0059]** As illustrated in Figs. 1-3, the first tubular member 14, the second tubular member 16, and/or the conventional threaded connection 18 were radially expanded and plastically deformed into engagement with the borehole 10. Alternatively, it is contemplated that there could be a cement annulus, an existing section of casing, a sleeve member, a pre-existing structure, or space left between the first tubular member 14, the second tubular member 16, and/or the conventional threaded connection 18 and the borehole 10.

**[0060]** As illustrated in Fig. 2, the expanded portion of the first tubular member 14 has been radially expanded and plastically deformed into engagement with the borehole 10. Alternatively, it is contemplated that there could be a cement annulus, an existing section of casing, a sleeve member, a pre-existing structure, or space left between the first tubular member 14 and the borehole 10.

**[0061]** As illustrated in Fig. 2, the expanded portion of the second tubular member 16 has been radially expanded and plastically deformed into engagement with the borehole 10. Alternatively, it is contemplated that there could be a cement annulus, an existing section of casing, a sleeve member, a pre-existing structure, or space left between the second tubular member 16 and the borehole 10.

- [0041] Suitable expansion devices for the expansion device 22, the first expansion device 26, and/or the second expansion device 28 include conventional expandable expansion devices commercially available from the Assignee of the present invention; Baker Oil Tools of Houston, Texas; or Weatherford Completion Systems of Houston, Texas.
- [0042] Suitable expansion devices for the expansion device 22, the first expansion device 26, and/or the second expansion device 28 include expandable expansion devices as disclosed in United States patent number 6,578,630 and/or United States patent number 6,012,523, the disclosures of which are herein incorporated by reference in their entirety.
- [0043] Suitable expansion devices for the expansion device 22, the first expansion device 26, and/or the second expansion device 28 include expandable expansion devices as disclosed in one or more of the Related Applications which were referenced and incorporated by reference above.
- [0044] Suitable expansion devices for the second expansion device 28 include conventional expansion devices commercially available from the Assignee of the present invention; Baker Oil Tools of Houston, Texas; or Weatherford Completion Systems of Houston, Texas.
- [0045] Suitable expansion devices for the second expansion device 28 include expansion devices as disclosed in one or more of Related Applications which were referenced and incorporated by reference above.
- [0046] The connection 18 includes a conventional pin member on the first tubular member 14, and a conventional box member on the second tubular member 16, where the pin member and the box member are threadably engaged.
- [0047] Suitable connections for the connection 18 include conventional threaded connections, conventional threaded connections with a pin and a box member, conventional welded connections, conventional butt welds, conventional flanges, conventional bolted flanges, or conventional threaded fittings.
- [0048] Suitable tubular members for the string of casing 12, the first tubular member 14, and/or the second tubular member 16 include conventional tubular members commercially available from the Assignee of the present invention; Baker Oil Tools of Houston, Texas; or Weatherford Completion Systems of Houston, Texas.
- [0049] Suitable tubular members for the string of casing 12, the first tubular member 14, and/or the second tubular member 16 include tubular members as disclosed in one or more of the Related Applications which were referenced and incorporated by reference above.
- [0050] Although Figs. 4-6 show a bottom-up expansion of the second tubular member 16, then the first tubular member 14, it is understood that the expansion device 22, the first expansion device 26, and/or the second expansion device 28 may be used in a top-down configuration to expand the first tubular member 14, then the second tubular member 16.

**[0072]** In several alternative embodiments, the method of radially expanding and plastically deforming a tubular member as illustrated in Figs. 1-6, may be implemented in accordance with the teachings of one or more of the Related Applications which were referenced above.

**[0073]** Although illustrative embodiments of the invention have been shown and described, a wide range of modification, changes and substitution is contemplated in the foregoing disclosure.



## CLAIMS

1. A method of creating a casing in a borehole located in a subterranean formation, comprising:

installing the casing in the borehole, the casing comprising a first tubular member, a second tubular member, and a threaded connection coupling the first tubular member to the second tubular member;

radially expanding and plastically deforming a portion of the first tubular member and a portion of the second tubular member; and

radially expanding and plastically deforming the threaded connection after radially expanding and plastically deforming the portions of the first and second tubular members.

2. The method of claim 1 wherein radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion with an expandable expansion device.

3. The method of claim 1 wherein radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion with an expansion device comprising rotating elements.

4. The method of claim 1 wherein radially expanding and plastically deforming the threaded connection comprises radially expanding and plastically deforming the connection with an expansion cone.

5. The method of claim 1 wherein radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion with a first expansion device, and wherein radially expanding and plastically deforming the threaded connection comprises radially expanding and plastically deforming the connection with a second expansion device.

6. The method of claim 1 wherein radially expanding and plastically deforming the first and second tubular member portions places the threaded connection in tension before radially expanding and plastically deforming the threaded connection.

7. The method of claim 1 wherein radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion into engagement with at least one of a pre-existing structure and the borehole.

8. The method of claim 1 wherein the threaded connection is a first threaded connection, wherein the casing further comprises a third tubular member and a second threaded connection coupling the second tubular member to the third tubular member, and wherein the method further comprises radially expanding and plastically deforming a portion of the third tubular member and then radially expanding and plastically deforming the second threaded connection.

9. The method of claim 8 wherein radially expanding and plastically deforming the portion of the third tubular member comprises radially expanding and plastically deforming the portion with an expandable expansion device.

10. The method of claim 8 wherein radially expanding and plastically deforming the second threaded connection comprises radially expanding and plastically deforming the connection with an expansion cone.

11. The method of claim 8 wherein radially expanding and plastically deforming the second and third tubular member portions comprises placing the second threaded connection in tension.

12. The method of claim 8 wherein radially expanding and plastically deforming the portion of the third tubular member comprises radially expanding and plastically deforming the portion into engagement with at least one of a pre-existing structure and the borehole.

13. The method of claim 1 wherein the threaded connection comprises a pin and a box member.

14. An expanded casing in a borehole located in a subterranean formation, comprising:

a first tubular member, a second tubular member, and a threaded connection coupling the first tubular member to the second tubular member, the casing produced by the process of:  
installing the casing in the borehole;  
radially expanding and plastically deforming a portion of the first tubular member;  
radially expanding and plastically deforming a portion of the second tubular member;  
and

radially expanding and plastically deforming the threaded connection after radially expanding and plastically deforming the first and second tubular member portions.

15. The casing of claim 14 wherein radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion with an expandable expansion device.

16. The casing of claim 14 wherein radially expanding and plastically deforming the threaded connection comprises radially expanding and plastically deforming the connection with an expansion cone.

17. The casing of claim 14 wherein radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion with a first expansion device, and wherein radially expanding and plastically deforming the threaded connection comprises radially expanding and plastically deforming the connection with a second expansion device.

18. The casing of claim 14 wherein radially expanding and plastically deforming the first and second tubular member portions places the threaded connection in tension before radially expanding and plastically deforming the threaded connection.

19. The casing of claim 14 wherein radially expanding and plastically deforming at least one of the first and second tubular member portions comprises radially expanding and plastically deforming the portion into engagement with at least one of a pre-existing structure and the borehole.

20. A system for creating a casing in a borehole located in a subterranean formation, comprising:



means for installing the casing in the borehole, the casing comprising a first tubular member, a second tubular member, and a threaded connection coupling the first tubular member to the second tubular member;

means for radially expanding and plastically deforming a portion of the first tubular member and a portion of the second tubular member; and

means for radially expanding and plastically deforming the threaded connection after radially expanding and plastically deforming the portions of the first and second tubular members.

21. The system of claim 20 wherein the means for radially expanding and plastically deforming at least one of the first and second tubular member portions comprises an expandable expansion device.

22. The system of claim 20 wherein the means for radially expanding and plastically deforming at least one of the first and second tubular member portions comprises an expansion device comprising rotating elements.

23. The system of claim 20 wherein the means for radially expanding and plastically deforming the threaded connection comprises an expansion cone.

24. The system of claim 20 wherein the means for radially expanding and plastically deforming at least one of the first and second tubular member portions comprises a first expansion device, and wherein the means for radially expanding and plastically deforming the threaded connection comprises a second expansion device.

25. The system of claim 20 wherein the means for radially expanding and plastically deforming the first and second tubular member portions comprises means for placing the threaded connection in tension before radially expanding and plastically deforming the threaded connection.

26. The system of claim 20 wherein the means for radially expanding and plastically deforming at least one of the first and second tubular member portions comprises means for radially expanding and plastically deforming the portion into engagement with at least one of a pre-existing structure and the borehole.

27. The system of claim 20 wherein the threaded connection comprises a pin and a box member.

